

Benzothiazole and Derivatives by LC-MS/MS

Application #AN4840

Conditions

Column: ACE 3 C8
Dimensions: 50 x 2.1 mm
Part Number: ACE-112-0502
Mobile Phase: A: 0.1% formic acid in H₂O
B: 0.1% formic acid in MeCN

Positive mode

Time (mins)	%B
0	5
5	50
10	95
23	95
23.1	5
28.1	5

Negative mode

Time (mins)	%B
0	5
2	5
5	50
9	50
9.1	5
12.1	5

Flow Rate: 0.12 mL/min


Injection: 5 µL

Detection: Sciex API 2000 LC-MS/MS, TurbolonSpray in positive and negative MRM modes, Ion spray voltage: ± 4200V, Ion source temperature: 120°C


Sample: Benzothiazoles in street run-off wastewater due to tyre tread wear.

Benzothiazoles are commonly used as vulcanisation accelerators in rubber production, but also as biocides and corrosion inhibitors in antifreeze and are widespread environmental pollutants in wastewater.

Positive ion mode

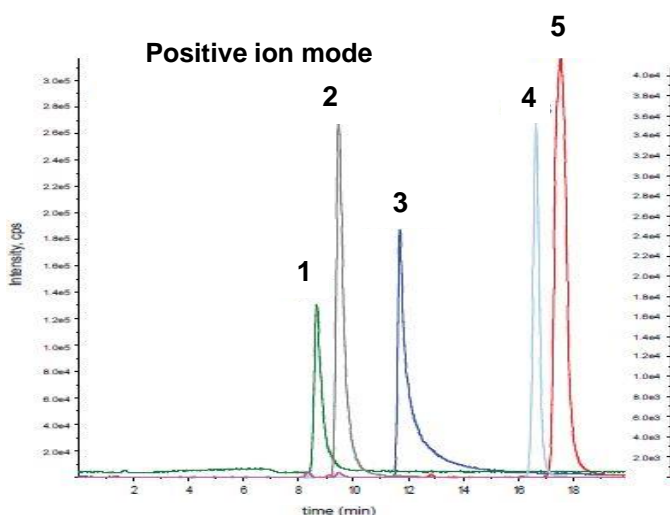

Negative ion mode

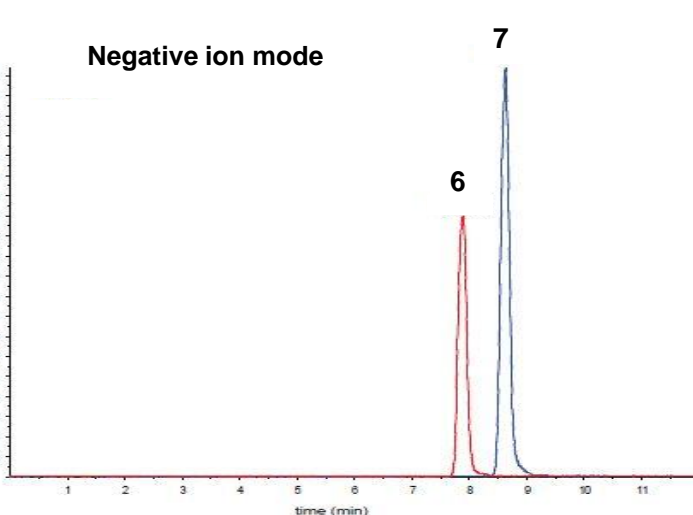

Transitions (m/z)

Analyte	Quantifier	Confirmatory
1. Benzothiazole	136 > 109	136 > 65
2. 2-Methylbenzothiazole	150 > 109	150 > 65
3. 2-Methylthiobenzothiazole	182 > 167	182 > 109
4. N-Cyclohexyl-2-benzothiazole sulphenamide	265 > 166	265 > 183
5. 2,2'-Dithiobisbenzothiazole	333 > 167	333 > 109
6. 2-Mercaptobenzoxazole	150 > 58	150 > 118
7. 2-Mercaptobenzothiazole	166 > 134	166 > 58

Reproduced with permission of
Department of Environmental Science
and Analytical Chemistry (ACES),
Stockholm University, Sweden